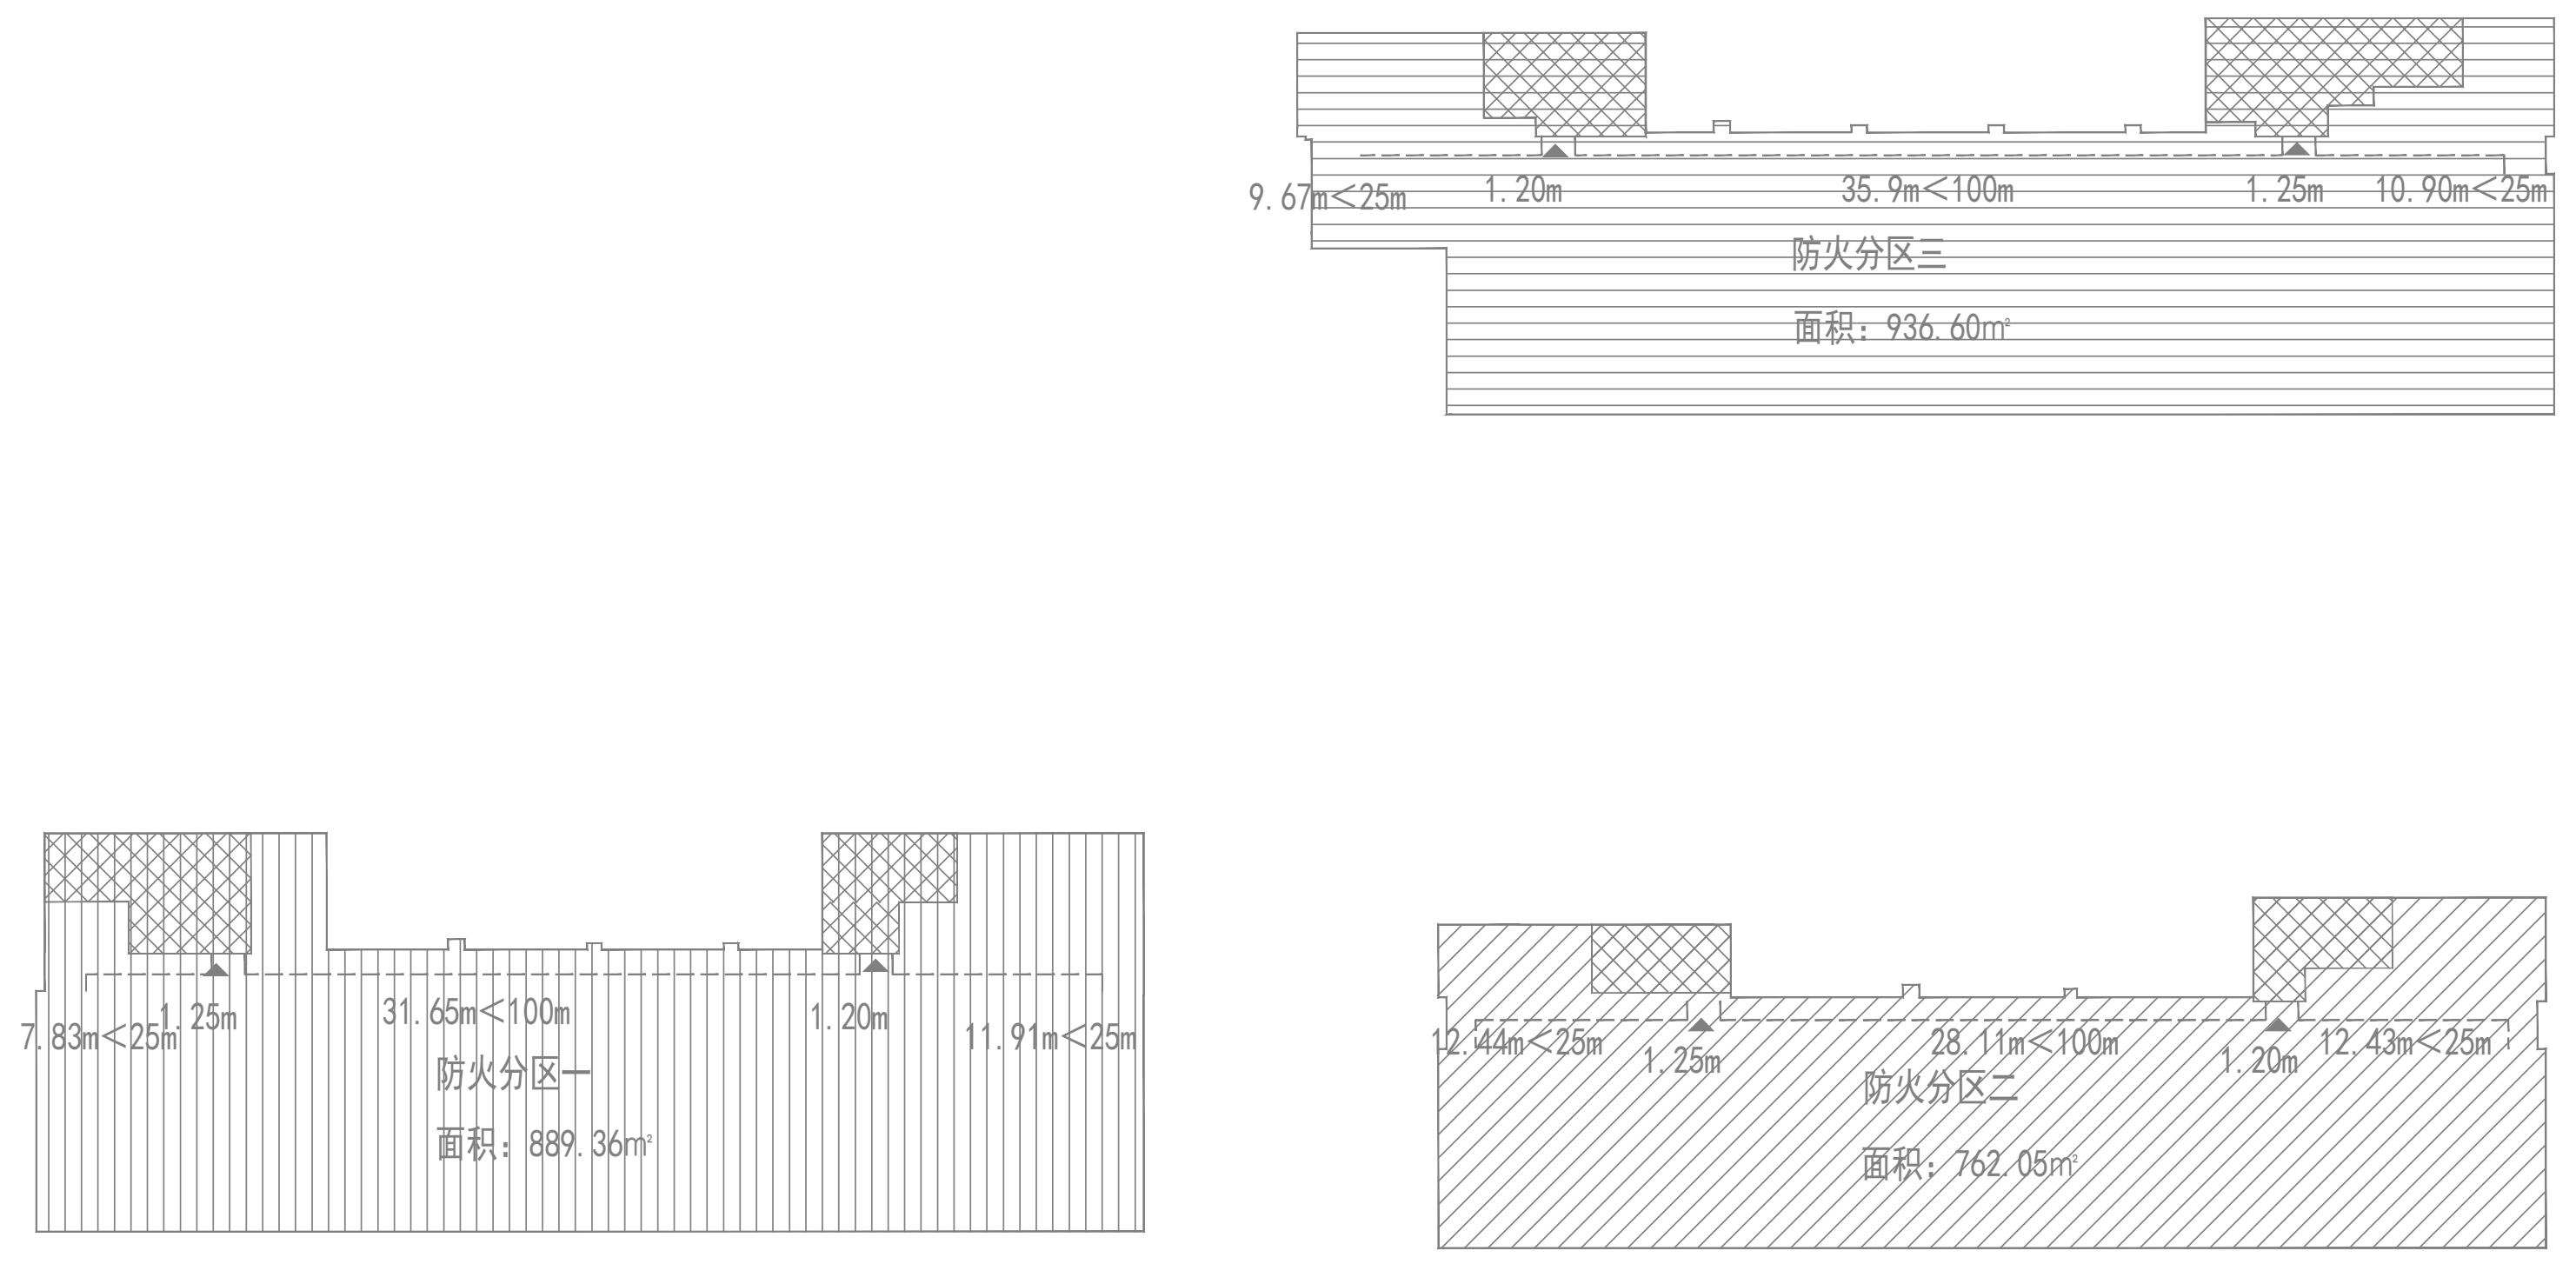
9.67m<25m
1.20m
35.9m<100m
1.25m
10.90m<25m
防火分区三
面积：936.60m²
7.83m<25m
1.25m
31.65m<100m
1.20m
11.91m<25m
防火分区一
面积：889.36m²
12.44m<25m
1.25m
28.11m<100m
1.20m
12.43m<25m
防火分区二
面积：762.05m²

三层防火分区示意图

图例说明：

序号	符 号	名 称	预埋方式	安装方式
7	⊠	多媒体配线箱	350*350*120	嵌墙安装距地0.3米
6	◎	紧急按钮	86盒	详见设计说明
5	TD	单孔网络设备插座	86盒	桌面安装/配合精装单位安装
4	TO	单孔网络设备地插	86盒	地面安装
3	AP	面板无线AP	86盒	顶距大梁底0.2m安装
2	2TD	双孔数据插座	86盒	下沿距地300mm\桌面安装
1	AP	吸顶无线AP	86盒	吊顶内安装

安装方式：

CC=沿顶暗敷
WC=沿墙暗敷
FC=沿地暗敷
CE=沿顶明敷
SCE=沿吊顶内敷设

管线简写说明：

R2=RVV2*0.5
R4=RVV4*0.5
R20=RVV2*1.0
R40=RVV4*1.0
RS20=RVS2*1.0
U5=UTP5E
SW5=SYWV75-5
P20=RVVP2*1.0
P40=RVVP4*1.0
CAT6=六类网线

设计说明：

1、 除特别标注外，其它管道均沿墙和顶板暗敷。
2、本图中智能化系统设备的标高为参考值，实际敷设时需与其它系统/专业协商。
3、现场设工时，如智能化设备遇横梁、楼梯，可适当调整安装高度。
4、智能化设备及管线与强电设备及管线之间的距离应不小于 300mm。
5、多媒体箱须引入220V强电。

所有点位以精装修位置为准

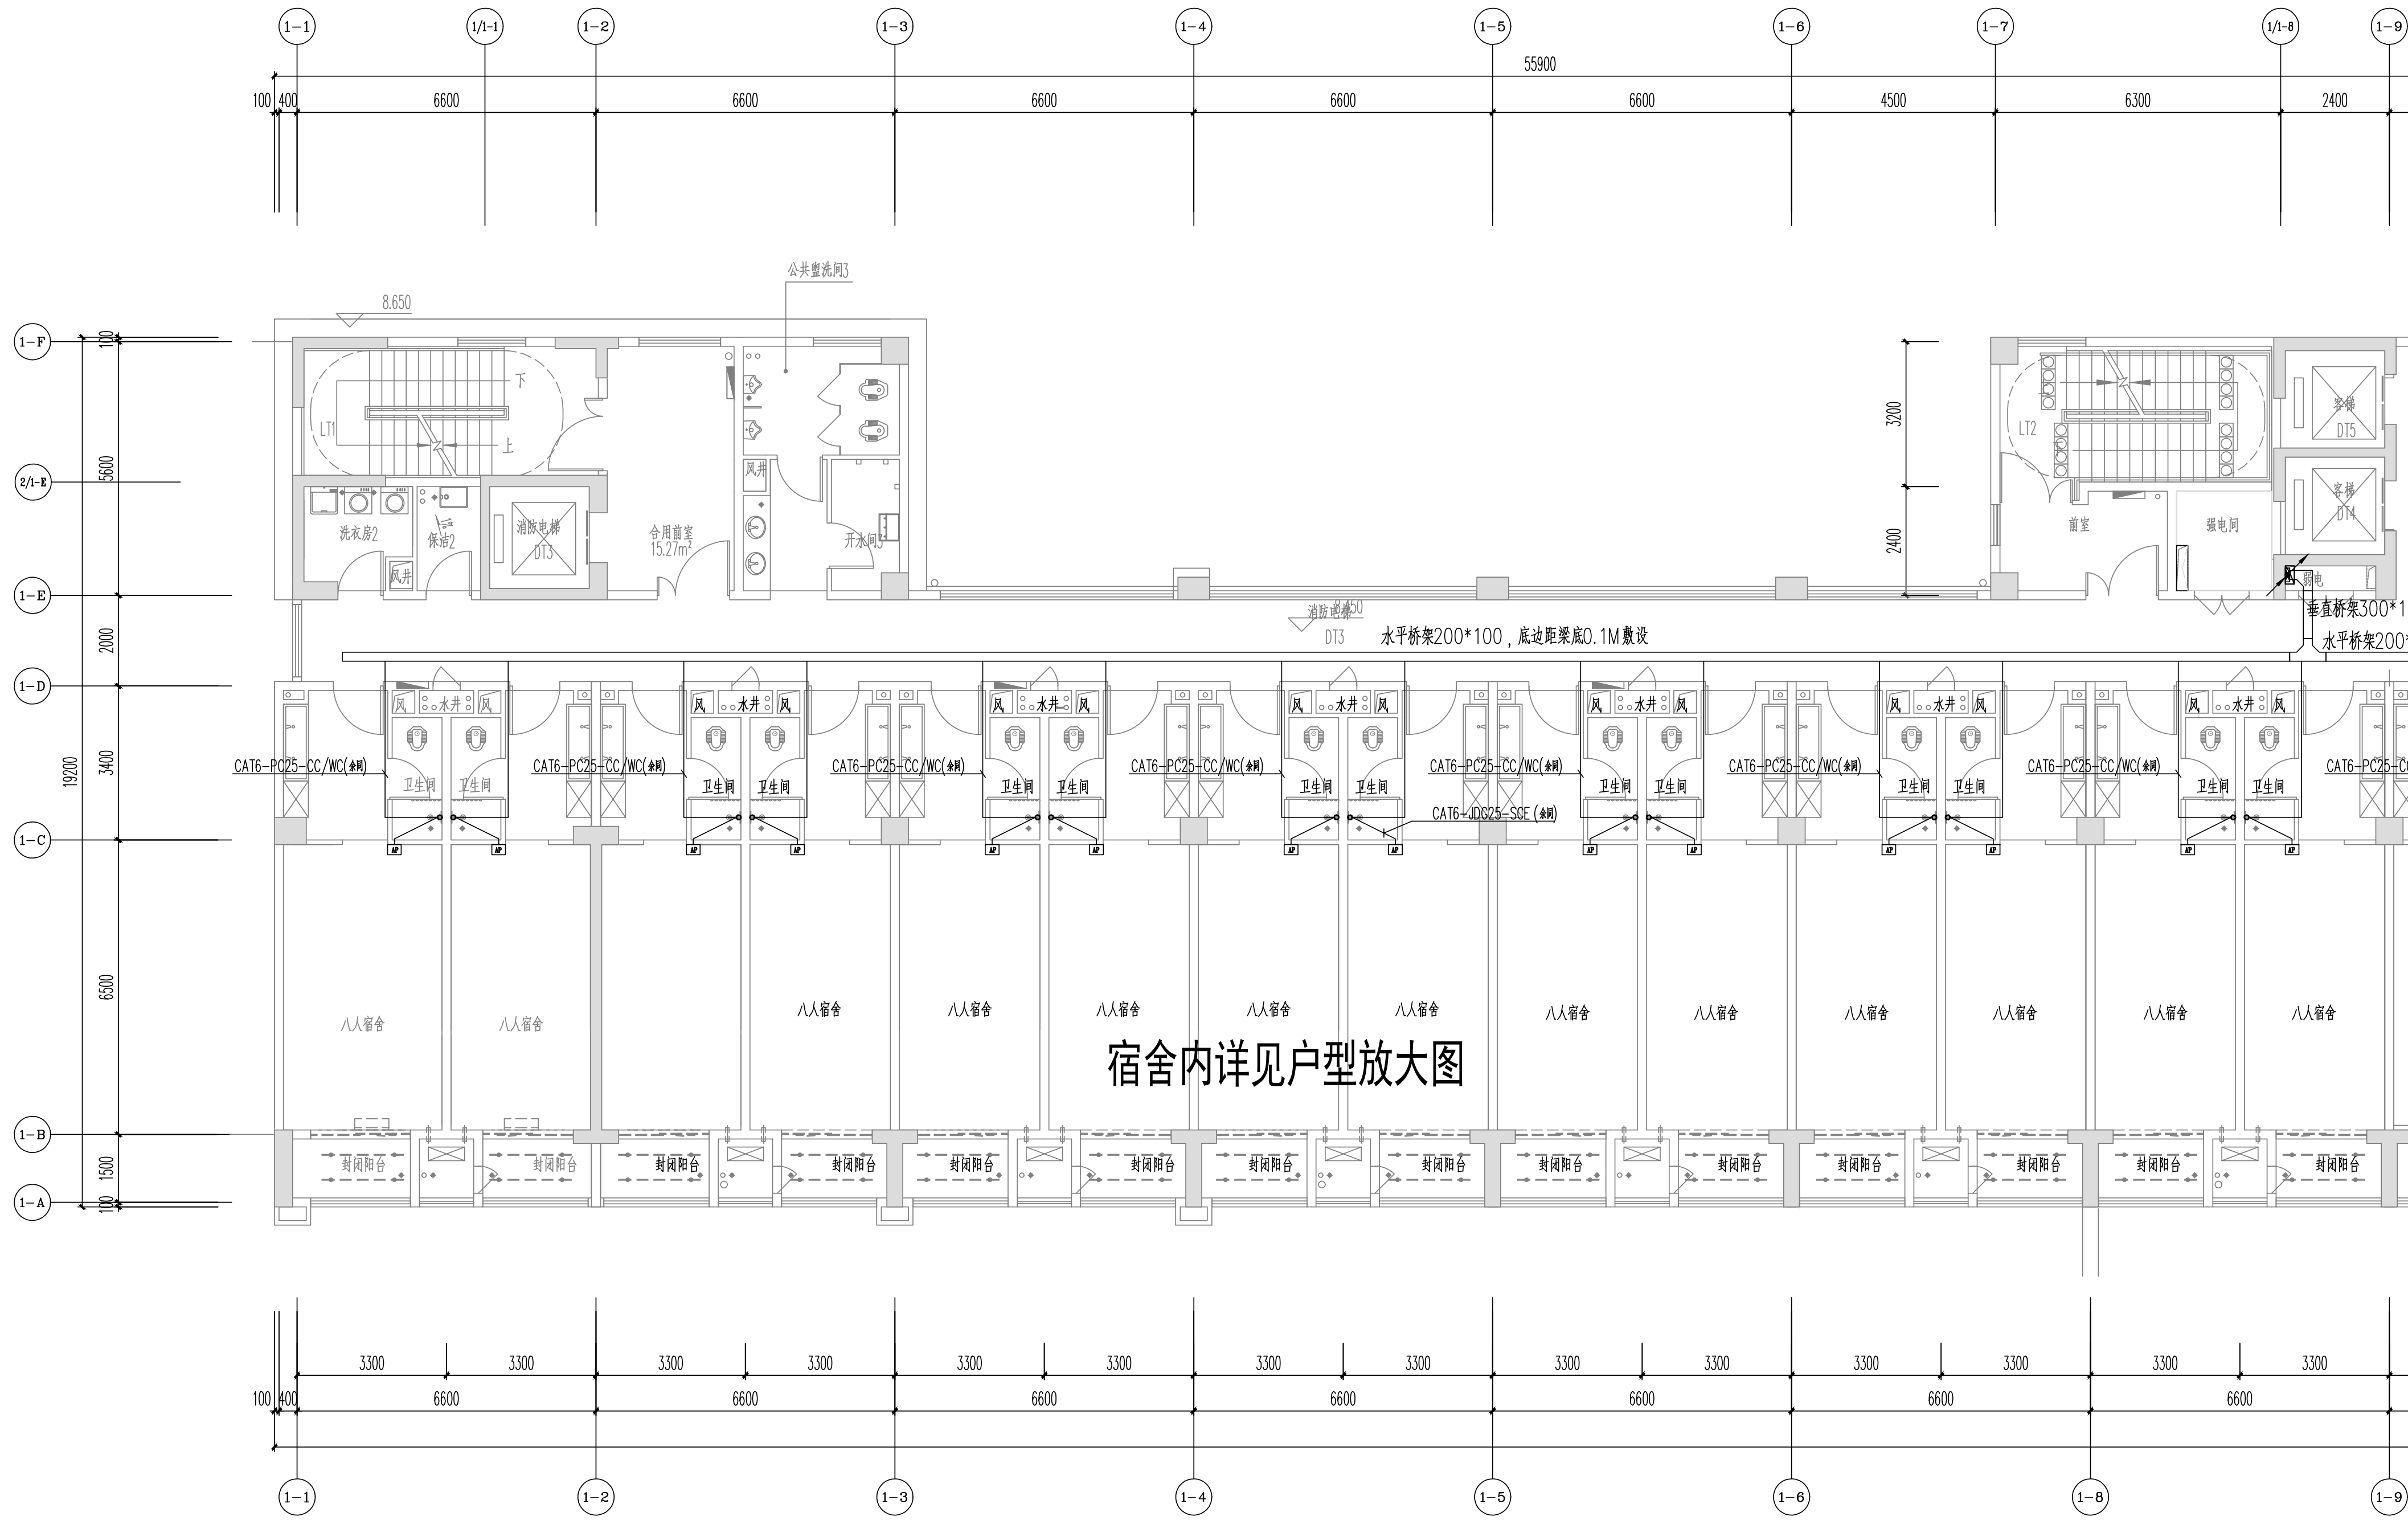
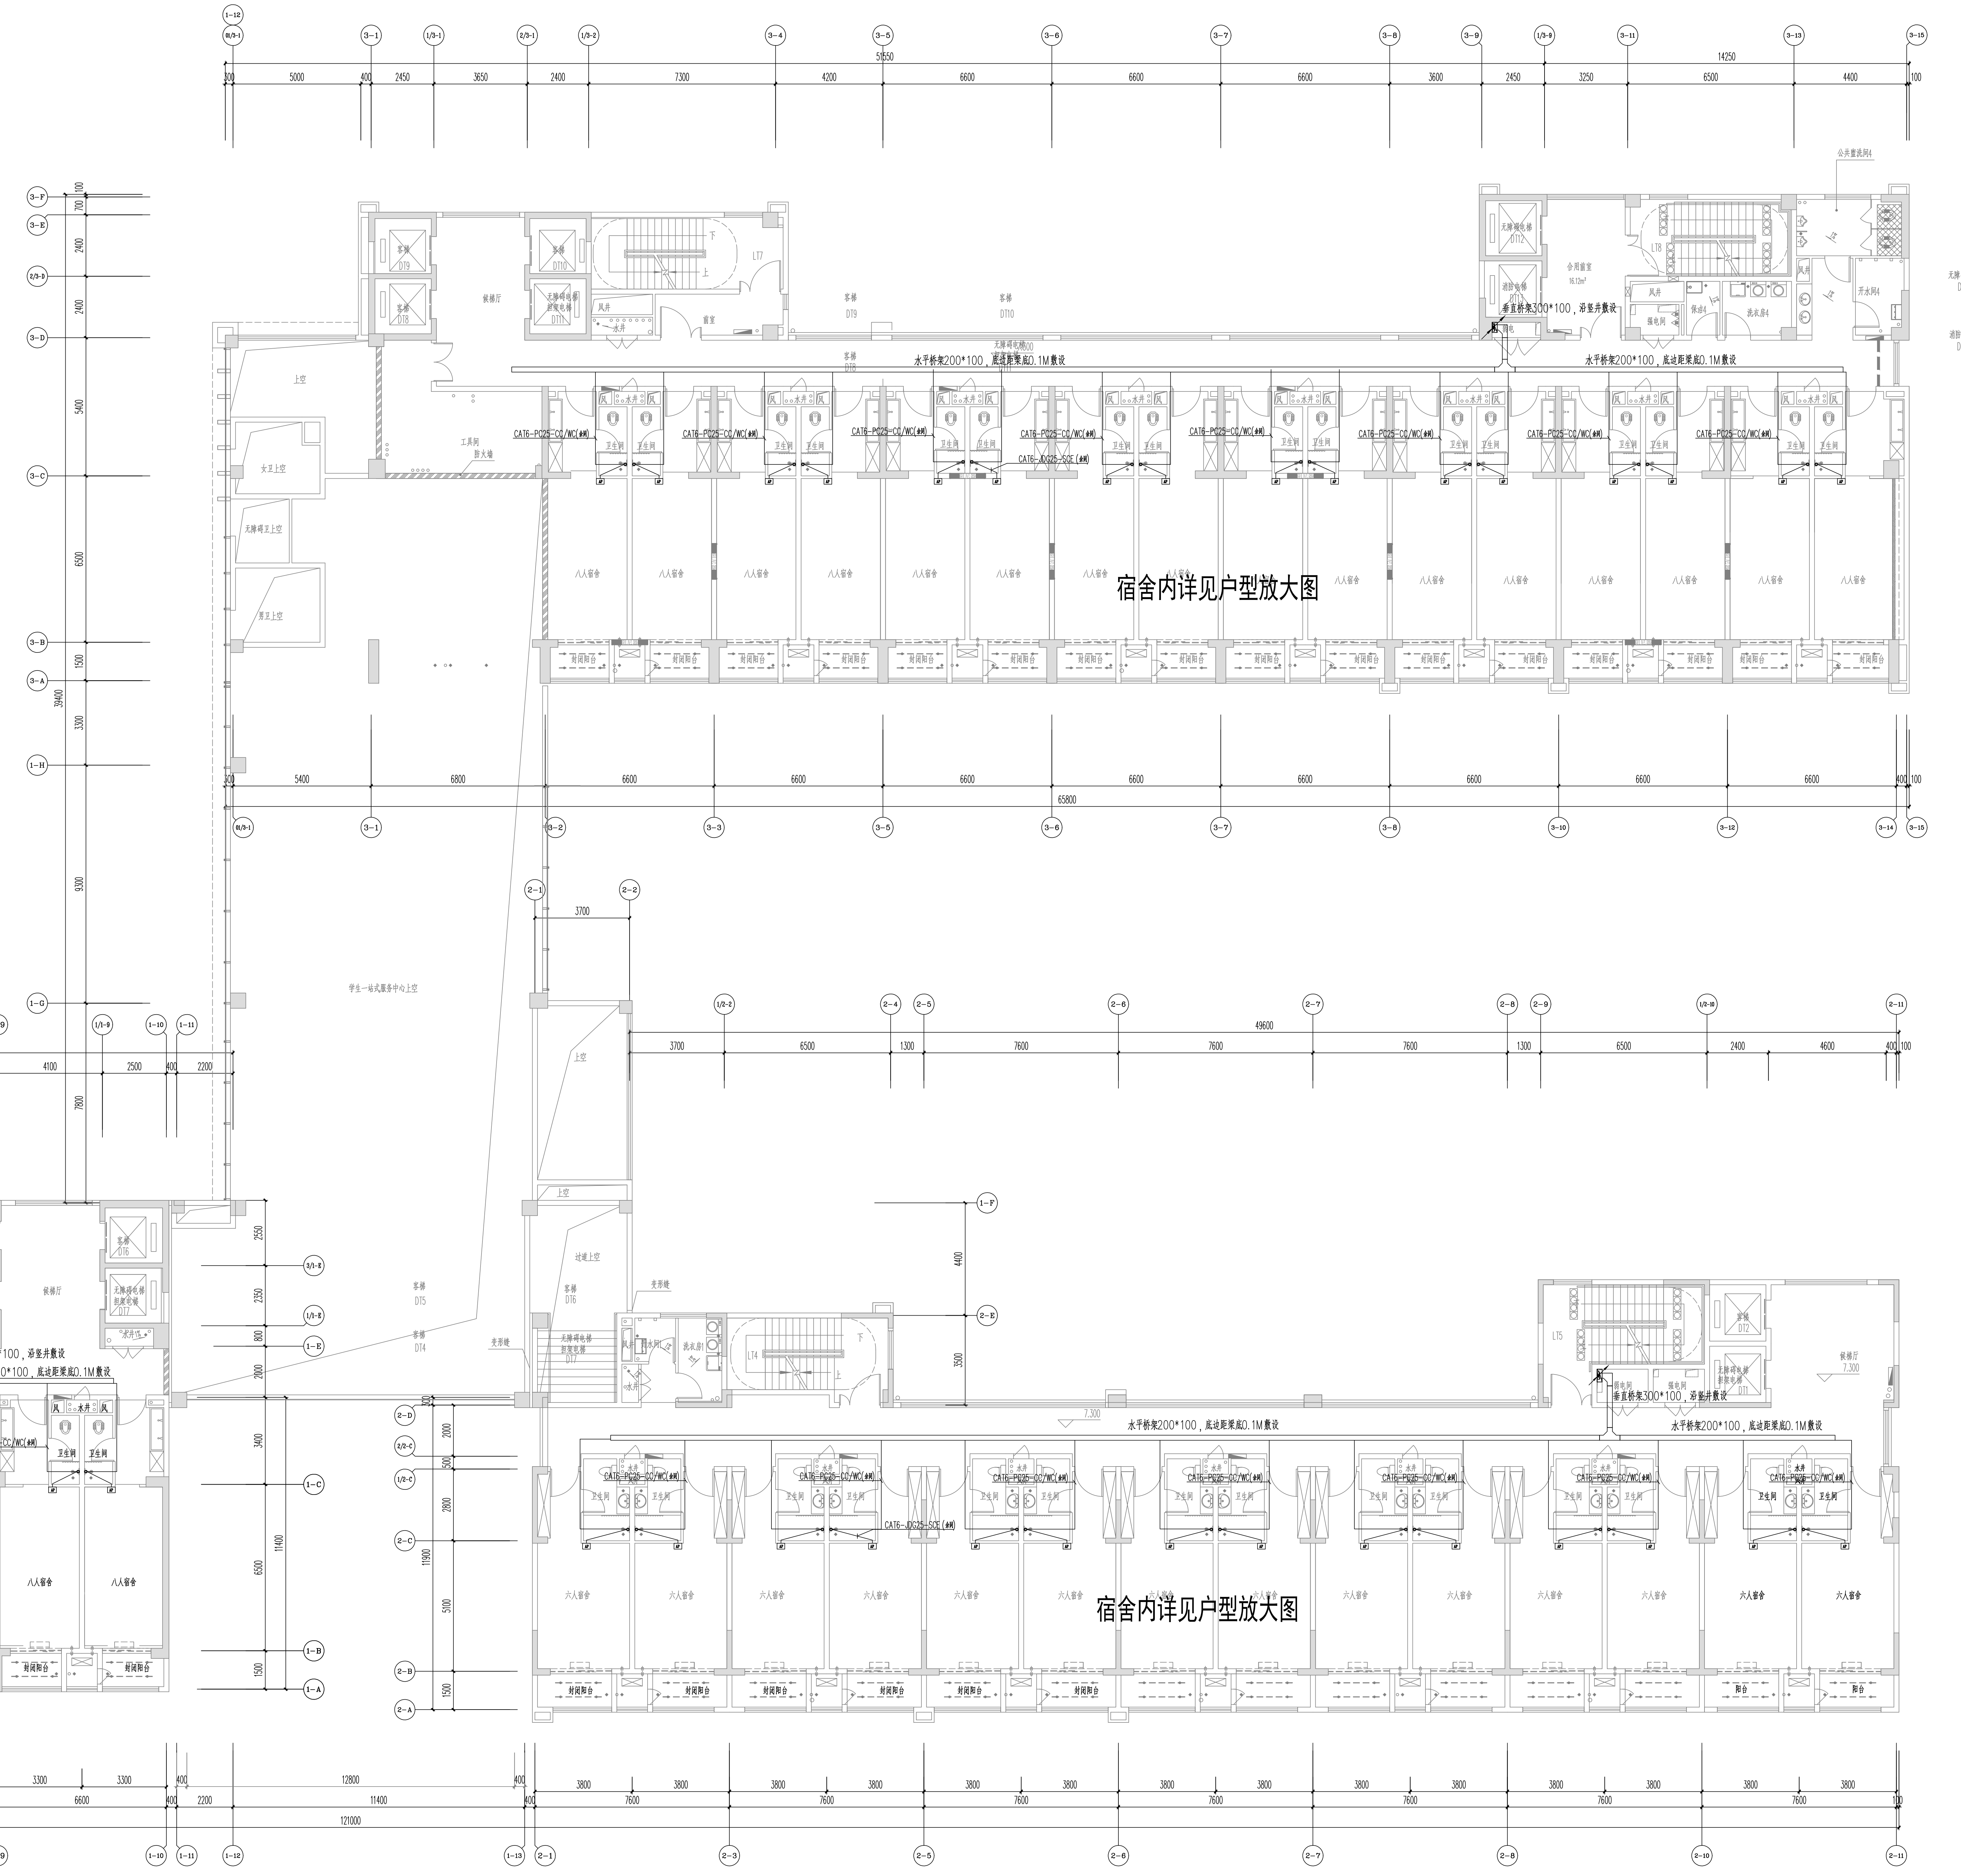
宿舍内详见户型放大图
宿舍内详见户型放大图
宿舍内详见户型放大图
水平桥架200*100，底边距梁底0.1M敷设
垂直桥架300*100，沿竖井敷设
CA76-PC25-CC/WC(4根)
CA76-JDC25-SCE(4根)
六人宿舍
阳台
卫生间
客梯
无障碍电梯
担架电梯
公共卫生间
1-1
1-2
1-3
1-4
1-5
1-6
1-7
1-8
1-9
1-10
1-11
1-12
1-13
1-A
1-B
1-C
1-D
1-E
1-F
2-A
2-B
2-C
2-D
2-E
2-F
3-A
3-B
3-C
3-D
3-E
3-F
3-1
3-2
3-3
3-4
3-5
3-6
3-7
3-8
3-9
3-10
3-11
3-12
3-13
3-14
3-15
121000
65800
55900
51650
49600
14250

三层智能化平面（二） 1:100

网络、综合布线

不得量取图纸尺寸施工。如有任何不详事宜，请在施工前与设计师会商。
本图设计内容未经设计师许可不得在其它地方使用。

DO NOT SCALE ANY DRAWINGS. THIS DRAWING IS THE PROPERTY OF THE DESIGNER AND MAY NOT BE USED WITHOUT HIS PERMISSION. REPORT ANY DISCREPANCIES TO THE DESIGNER PRIOR TO PROCEEDING WITH WORK.

图 纸 会 签
DISCIPLINE JOINTLY SIGNED BY

(专 业) (DISCIPLINE)	(实 名) (NAME TYPED)	(签 名) (SIGNATURE)	(日 期) (DATE)
建 筑 ARCHITECTURE			
结 构 STRUCTURE			
给 排 水 WATER&WASTE WATER			
电 气 ELECTRIC			
暖 通 HVAC			

南京金海设计工程有限公司
NANJING JINHAI DESIGN ENGINEERING CO.LTD
资质证书编号：A132003438 A232003435

出图章：
PERMISSION STAMP

江苏省工程勘察设计出图专用章
南京金海设计工程有限公司
资质等级范围：建筑行业（建筑工程）甲级
资质证书编号：A132003438 有效期至：2028年12月22日

注册建筑师/工程师章：
REGISTERED ARCHITECT/ENGINEER'S AFFIX

	(实 名) (NAME TYPED)	(签 名) (SIGNATURE)
审 定 EXAMINED	张岩	
项目负责 PROJECT MANAGER	尹卫良	
专业负责 DISCIPLINE CHARGE	田卉蓉	田卉蓉
审 核 AUDITED	田卉蓉	田卉蓉
校 对 CHECKED	朱海健	朱海健
设 计 DESIGNED	尹红梅	

建设单位 CLIENT	江苏省公共工程建设中心有限公司		
项目名称 PROJECT TITLE	江苏商贸职业学院新校区扩建三期工程学生宿舍四、五及学生和教师集体宿舍建设项目 学生宿舍四、五及学生和教师集体宿舍		
工程编号 PROJECT NUMBER	202402	子 项 号 SUB-DIVISION	01
		图 号 DRAWING NUMBER	智施-37a

图 名：
DRAWING

三层智能化平面（二）

专 业 DISCIPLINE	阶 段 STATUS	比例 SCALE	日 期 DATE
智能化	施工图	1:100	2025.11